



Applications

- 5.2/5.5/5.8GHz WLAN System
- 5.8GHz UNII ISM System
- Support 802.11a,g
- WiFi System
- Point to Point or Point to Multipoint Applications
- Bridges Antenna


Features

- Broad Band, 5.2/5.5/5.8GHz Three Band Operation
- High Gain, LLow VSWR
- Light Weight, Small Size, Low Profile
- Strong Corrosion Resistance
- Integrated Cavity for Customer's Equipment
- Supplied with Mast Mounting Kit

Specifications

| Model | TDJ-5758BKT-C |
|---------------------------|-------------------------|
| Freq. Range-MHz | 5150 ~ 5850 |
| Gain-dBi | ≥23 |
| Ver. Beamwith-° | 11 |
| Hor. Beamwidth-° | 11 |
| VSWR | ≤1.5 |
| Impedance-Ω | 50 |
| Polarization | Vertical or Horizontal |
| Max. Power-W | 50 |
| Connector | mmcx male or Customized |
| Dimensions-mm | 306x306x25 |
| Weight-Kg | 2.6 |
| Color | White |
| Mounting | Pole |
| Mounting Mast Diameter-mm | φ40 to 50 |

Install Sketch

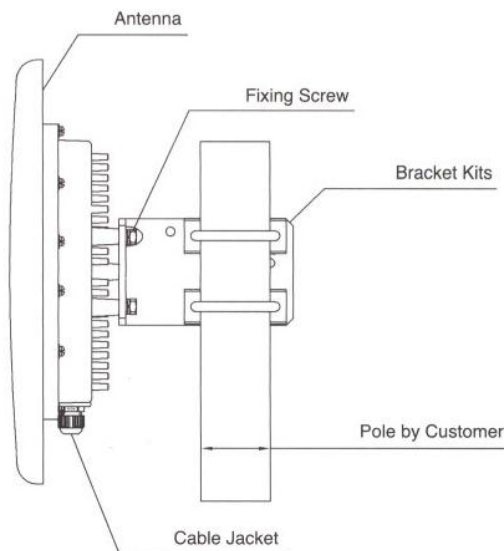

- دارای مجوز
- سازمان تنظیم مقررات ارتباط رادیویی
- دارای گواهی کیفیت از:
- دانشکده فنی دانشگاه تهران
- صدا و سیما جمهوری اسلامی ایران (تکنا)

